


POLYTETRAFLUOROETHYLENE SHEET

PTFE molded sheet is manufacured by molding method with PTFE granular resin.It has the best chemical resistance and highest conductivity,it is not aging and has a wax-like surface to which anything hardly sticks,the friction factor is the lowest and its unloaded operating temperature range is from -180~260°C .

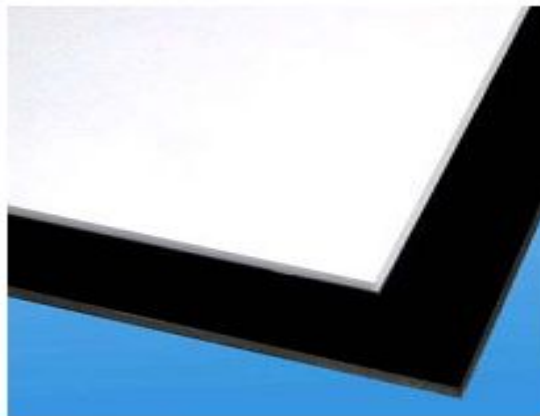

TECHNICAL TARGET:

项 目 ITEM	单 位 UNIT	指 标 VALUE
表观密度 Apparent Density	g/cm ³	2.1~2.3
拉伸强度 Tensile strength	MPa	15
断裂伸长率 Percentage of Breaking Elongation	%	150
介电强度 Dielectric strength	kV/mm	10

标称面积: 1000×1000mm; 1200×1200mm; 1500×1500mm
 Area of the sheets:1000×1000mm;1200×1200mm;1500×1500mm