


波纹栅（板）及绝缘紧箍

此类产品主要用于间接式出线：

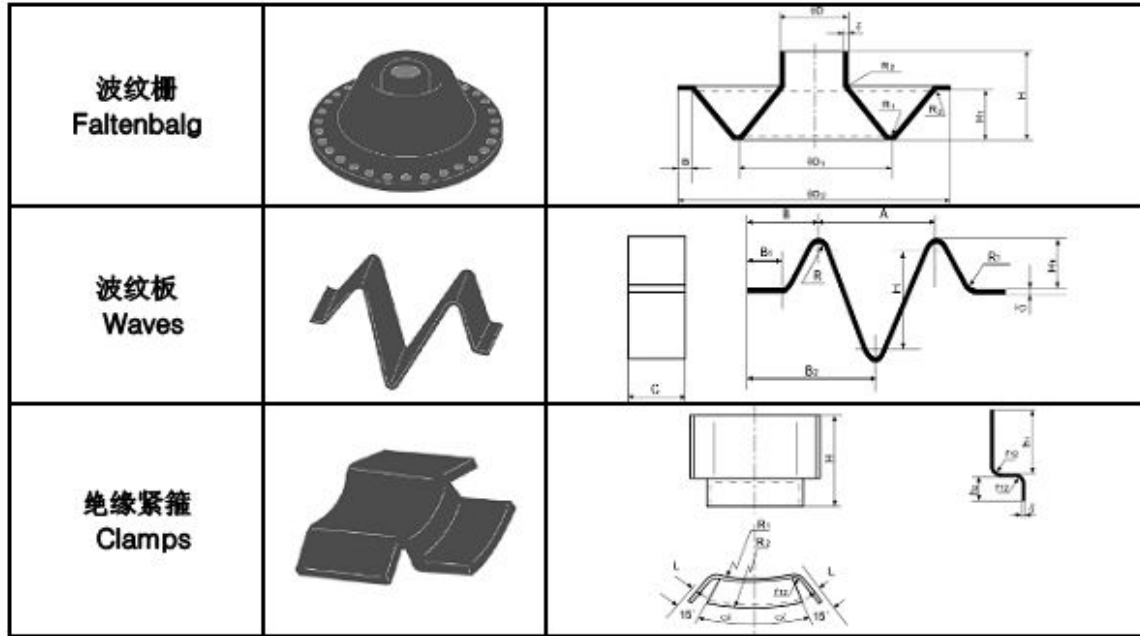

波纹栅、波纹板和绝缘紧箍

尺寸 Dimensions	D	D1	D2	H	H1	B	R	ζ	
偏差 Tolerance	+5/0	± 2	+6/0	+6/4	± 5	+3/0	± 5	+1.5/-1	
尺寸 Dimensions	H	h1	h2	R1	R2	a	ζ	R	
偏差 Tolerance	± 4	± 2	± 2	± 3	± 5	± 1°	+1.5/-1	± 3	
尺寸 Dimensions	A	B	B1	B2	H	H1	R	ζ	C
偏差 Tolerance	± 3	+5/0	+3/0	+6/-1	± 3	± 4	± 5	+1.5/-0.5	± 2

模具制作范围

D	D1	D2	H	H1	R1	R2	R3	B	ζ
φ 268	φ 600	φ 1024	270	180	R30	R30	R30	60	10
φ 306	φ 600	φ 1024	270	180	R30	R30	R30	60	10
φ 306	φ 600	φ 1024	400	355	R10	R20	R15	132.5	8
H	h1	h2	L	R1	R2	a	ζ		
248	146	90	15	R94	R146	45°	12		
282	180	90	15	R91	R165	45°	12		
A	B	B1	B2	H	H1	R	ζ	C	
150	115	60	90	148	84	10	20	100	